


■ Precision Cooling for  
Business-Critical Continuity

Liebert Hiross HPM  
*Designed for top level performance and reliability*



 **Liebert**

  
**EMERSON**  
Network Power

**Emerson Network Power**, a Division of Emerson, is a global company matching technology and design to supply innovative solutions for its customers' benefit.

Emerson Network Power is the leader in the “**business-critical continuity**” field thanks to its products and services.



*Data Center*



*Financial networks*

**Precision Cooling** is a key requirement to ensure safe working conditions to datacenters, computer rooms and other equipment that simultaneously need a high sensible heat discharge and a precise temperature and humidity control. **Liebert Hiross HPM** incorporates the whole experience of Emerson Network Power in a unique range of cabinet air coolers suitably designed to ensure performance and reliability. Flexible solutions and low running costs add value to the **IT facility**.



## The product

Liebert Hiross HPM units are cabinet air conditioners. They can feature EC fans, with several air delivery versions: downwards, that is with underfloor delivery, upwards and “displacement”. Liebert Hiross HPM units are equipped with iCOM control, featuring an integrated Web connection and two optional graphic display types. Liebert Hiross HPM combines different cooling systems for the ideal solution to every facility:

- **Direct expansion:** available with the air or water cooled Copeland Digital Scroll™ compressors.
- **Chilled water:** to be used with Liebert Hiross HPC.
- **Dual-Fluid:** matches low running costs and total reliability. It standard operates with chilled water, thus guaranteeing “business-continuity”, thanks to the spare compressors that can intervene in a few seconds, as soon as the central unit stops.
- **Freecooling:** no power consumption if needless. Working 365 days a year, it uses the low winter temperature to cool the rooms, without using compressors.

## Reliability

### *Performance, equipment protection and fast business re-establishment*

#### **Design**

Liebert Hiross HPM has been especially designed to achieve top reliability. All components have been sized for the lowest possible stress.

Models have been rigorously tested before being launched on the market. The Liebert Hiross HPM range is Eurovent certified.

#### **Monitoring**

The Emerson Network Power Monitoring solutions ensure the best control on energy and air conditioning within IT facilities.

Communication to all protocols (Modbus, Bacnet, Lonworks, HTTP and SNMP are just a few of the available ones) enables the integration both with the BMS system and with the facility software.

#### **iCOM™**

The iCOM control device handles the operation of the HPM units, using over twenty years of experience in the development of communication systems and controls.

The iCOM control is featured by a special control algorithm, ensuring top reliability under every condition. It directly connects with the facility network (Ethernet) and enables the communication among multiple HPM units for synchronized operations, guaranteeing top reliability and precise room control.

#### **Teamwork**

The HPM unit teamwork within the same room is available thanks to the integrated Ethernet connection.

The self-control of redundant units alternates the stand-by positions and gives priority to possible hot areas.





### **iCOM™ control**

- *Several graphic display options*
- *On-line unit log*
- *Integrated Web communication*
- *Preventive maintenance through an advanced troubleshooting*
- *400 stored events/unit*
- *Up to 16 stored temperature and humidity days*



**Ethernet**

## *Flexibility*

### *Business-tailored*

#### **EC fans**

Variable speed fans achieve a wide range of air delivery and static pressure. They ensure a correct air distribution even when the facility expands.

Further installed devices need a higher cooling capacity.

EC fans can increase the air delivery to meet the demand, thanks to the continuous regulation through the iCOM control.

EC fans can even recover possible unexpected load losses due to new wiring or other elements inside the raised floor.

The special EC motors get the best performance vs. AC and DC motors. They do not emit electromagnetic noises, as they do not use power delivered by frequency converters. Further, EC motors feature a consumption about 30% lower than the one by traditional AC motors.

#### **Copeland Digital Scroll™**

Copeland Digital Scroll™ compressors combine the sturdiness of scroll compressors with the capacity of operating with varying load.

When the traffic managed by the equipment faces sudden changes, the facility experiences thermal load peaks.

Copeland Digital Scroll™ compressors quickly follow the temperature and supply a load-balanced cooling capacity.

The Copeland Digital Scroll™ technology has no adverse effect on electronic equipment, unlike other solutions.

Thus, it can be used also in industries and sectors where sensible equipment - such as computers that must not be subject to any EMI - operate.






### EC fans

- AC powered 50/60 Hz without frequency converter
- Static pressure continuous adjustment
- Energy consumption lower by approx. 30% vs. AC motors
- No maintenance
- Long life transmission

### Copeland Digital Scroll™

- Better room control
- Energy saving with partial load
- Quick adjustment to load changes
- Simple and reliable mechanics
- AC powered 50/60 Hz without frequency converter
- EMC free

Ethernet

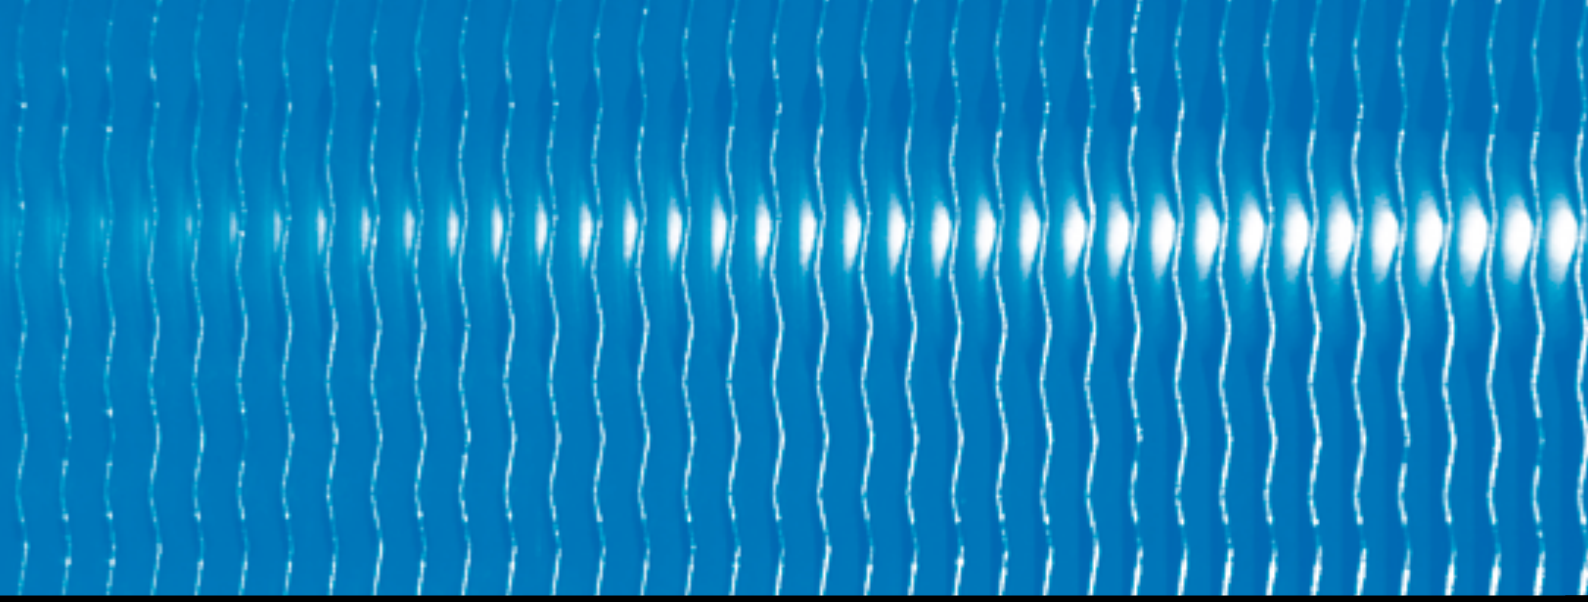

## *Running cost*

### *Keeping profitability*

#### **Efficiency**

Cooling a computer room needs high power. Energy efficiency is the top target in Liebert Hiross HPM designing. Over-sized heat exchangers and optimized aerodynamics allow one of the lowest energy consumption in the Precision Conditioning Cooling field.

#### **Maintenance**

The handy user interface and the quick front access to mechanical adjustments shorten the routine maintenance time.


#### **Compactness**

Liebert Hiross HPM units take less space thanks to their reduced plan dimensions. The compact design still ensures the best performance thanks to fluideo-dynamic analyses and several lab tests.

#### **Freecooling**

Freecooling units minimize energy consumption. Working 365 days a year, they use the low winter temperature to cool the rooms, without using compressors.



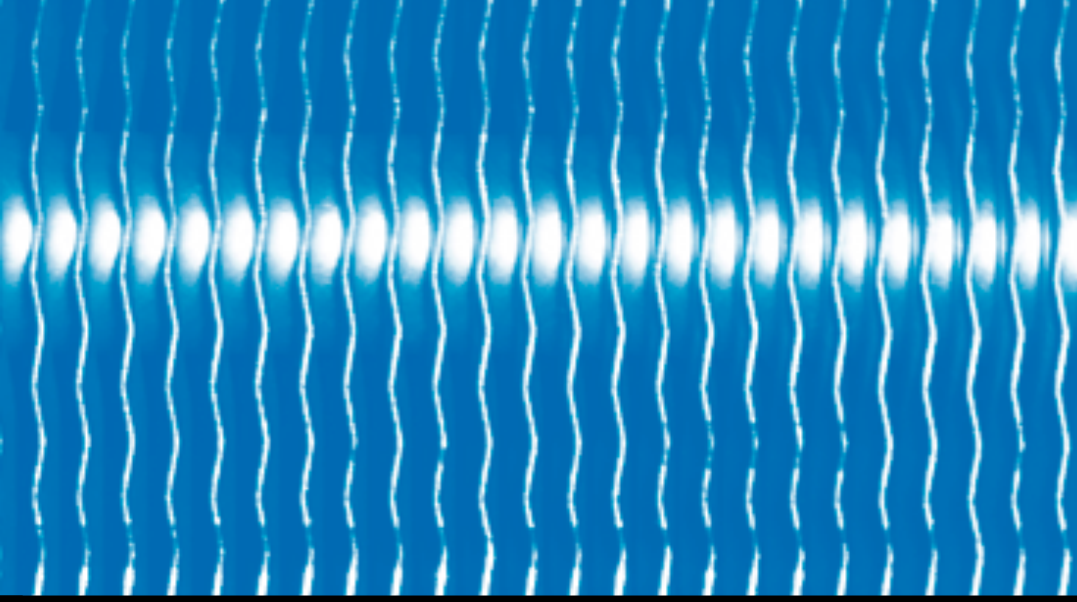

### Heat exchange surface

- *High Energy Efficiency Ratio (EER). It basically depends on the heat exchange surface. Refrigerating circuits consume less energy.*
- *High Sensible Heat ratio (SHR). Sensible heat vs. latent heat. Technological applications require a high sensible heat discharge, without lowering the room humidity too much, as it would need to be restored through a humidifier.*

Ethernet





## *Leading Precision Cooling Over IP*


### *Integrate your Network Management*

#### ■ **Connectivity and monitoring solutions**

Whether you have a Network Management System or a BMS and you need to integrate Liebert Hiross HPM, this can be simply done through a Web card: SNMP, Modbus, HTTP and Lonworks are just a few of the protocols available.


Liebert Sitescan and Hirovisor IP, advanced monitoring solutions that can be offered for both local and remote monitoring either through a dial up line or through internet.

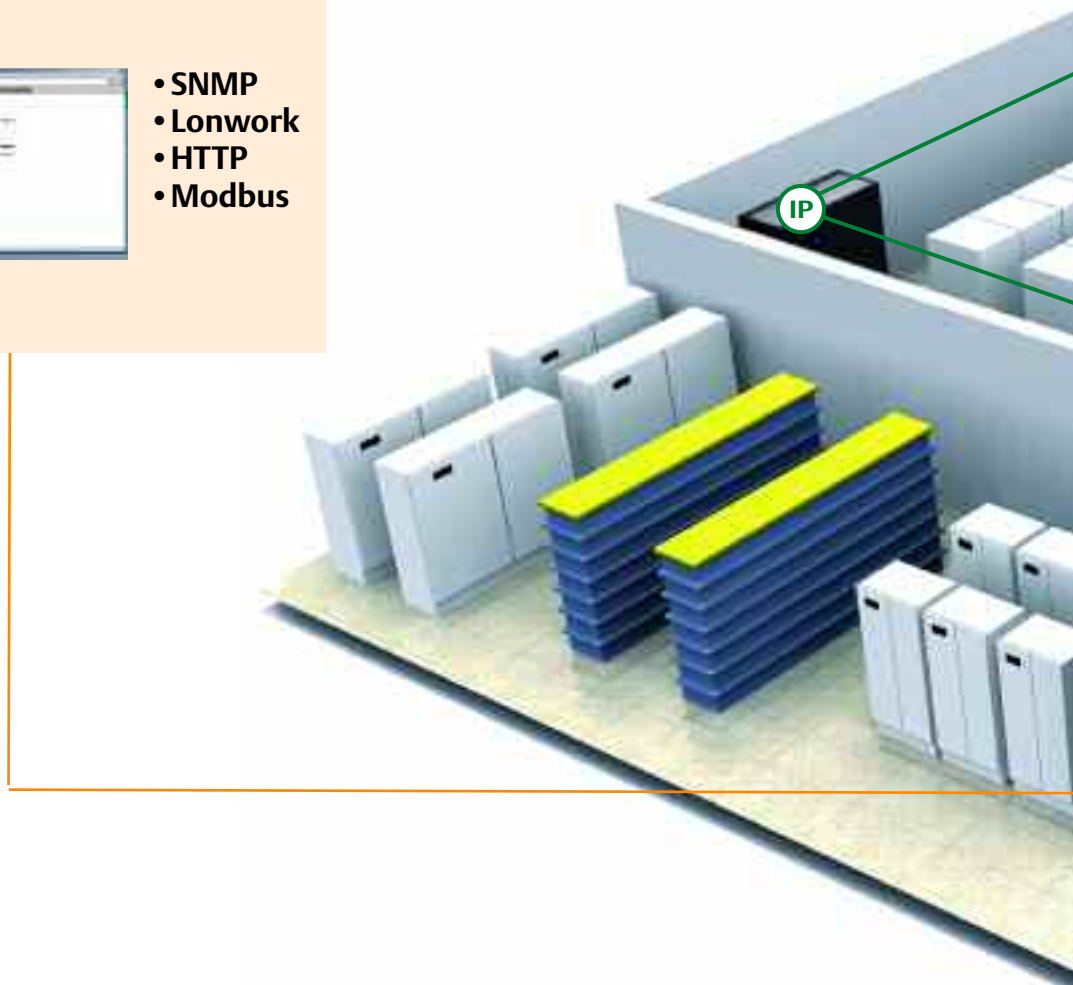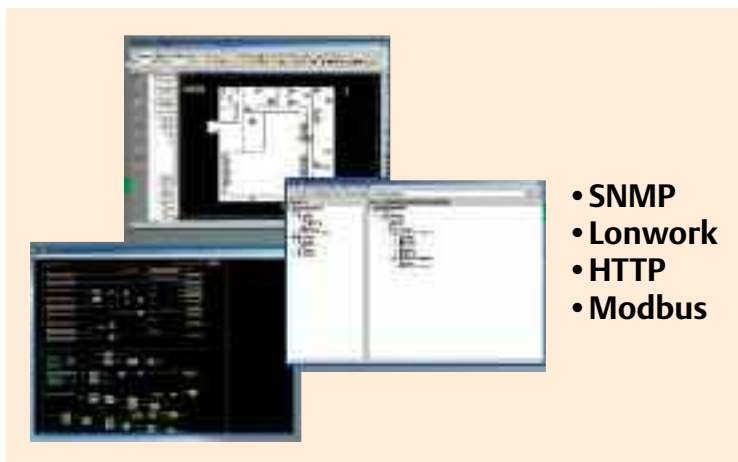

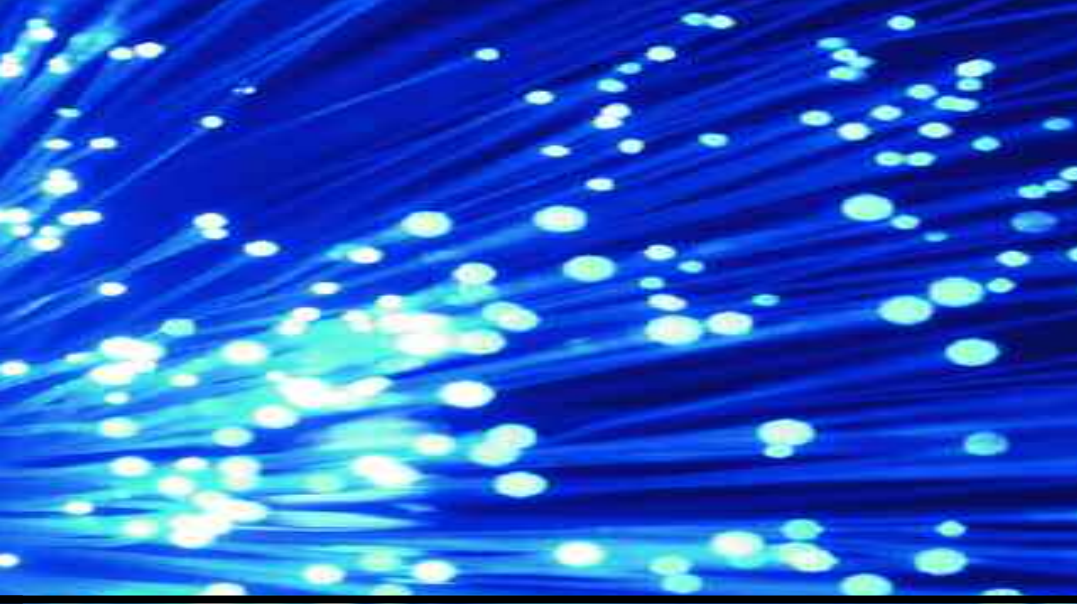

### iCOM™ display

Whenever you are in the network you can plug iCOM user interface and browse the connected units thus enabling a first level of monitoring.

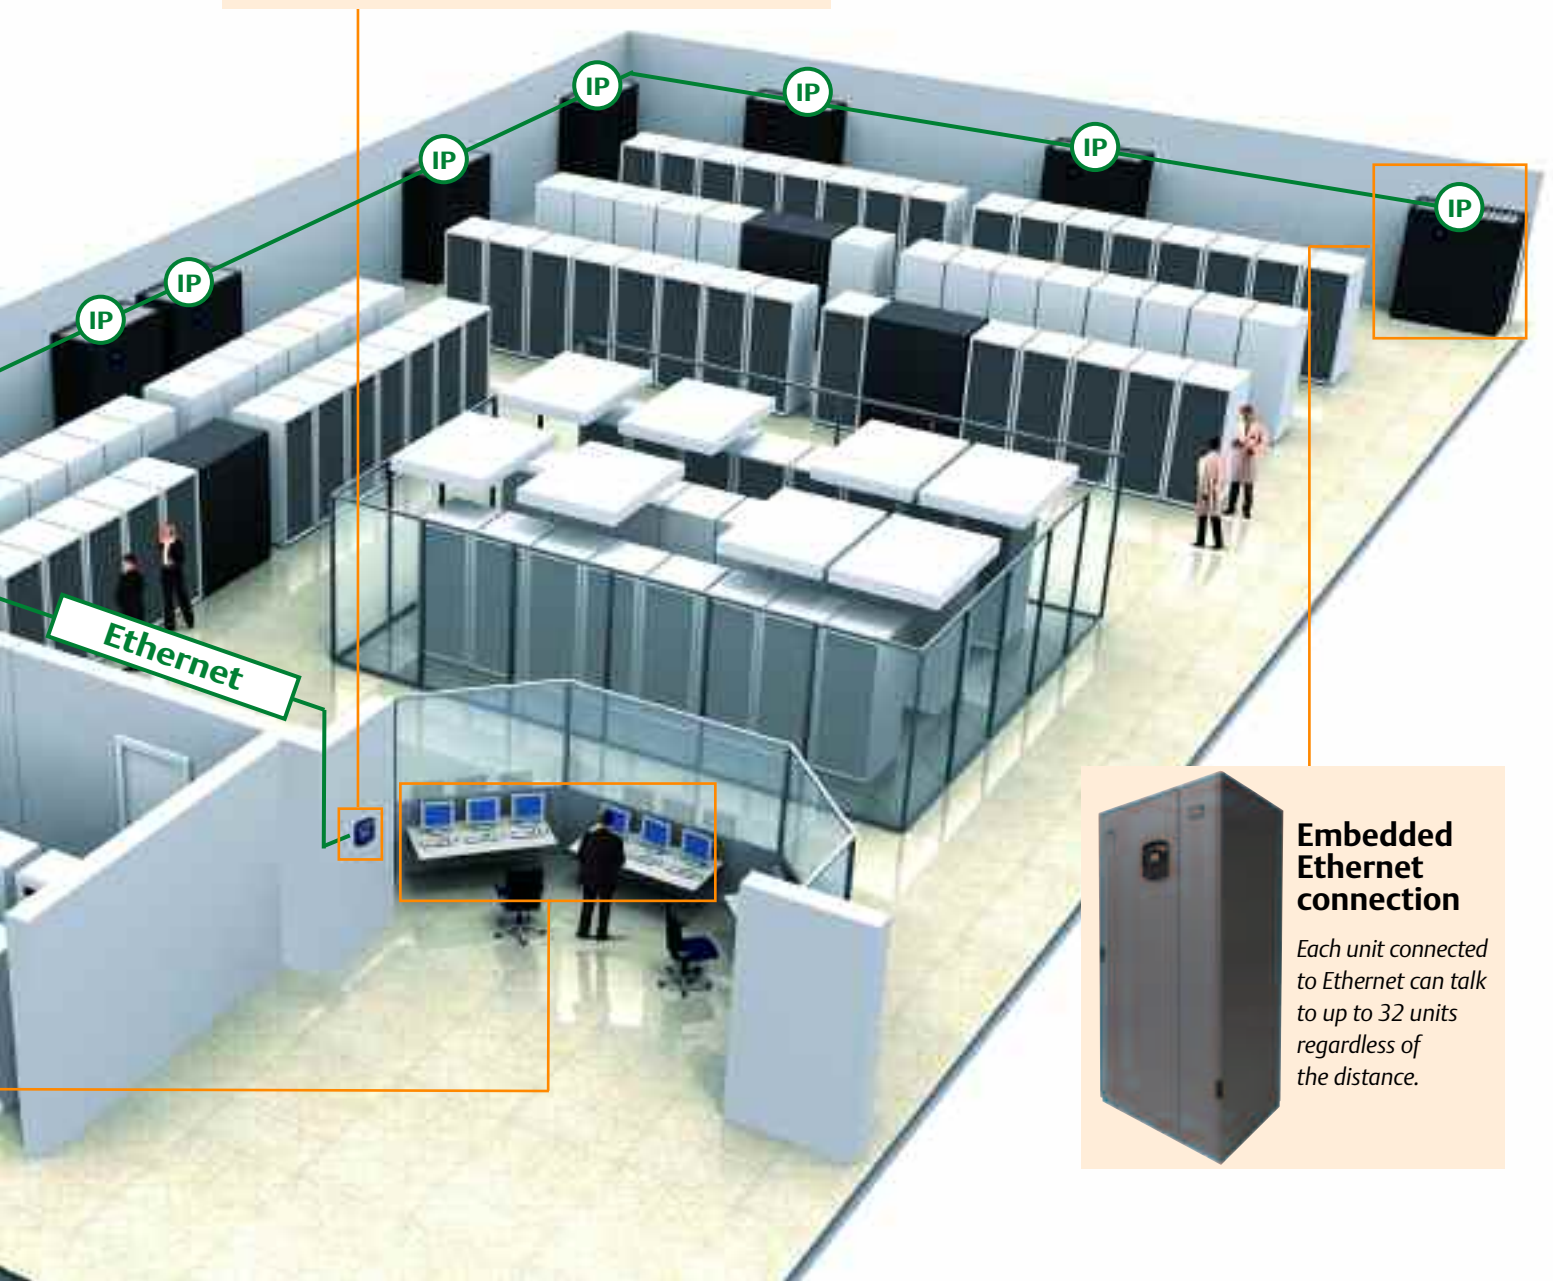

### Embedded Ethernet connection

Each unit connected to Ethernet can talk to up to 32 units regardless of the distance.

## Functional schemes



**A - Air-cooled  
with remote condenser**



**W- Water-cooled**



**D - Air-cooled Dual-Fluid**



**D - Water-cooled Dual-Fluid**



**F - Freecooling**



**C - Chilled water**



## Combination with condensers

Max. outdoor temperature 35° C

Model	Standard	Low Noise
S04 A	1 x HCE07	1 x HCE 07
S05 A	1 x HCE07	1 x HCE 07
S07 A	1 x HCE10	1 x HCE 14
S10 A	1 x HCE14	1 x HCE 14
S12 A	1 x HCE14	1 x HCE 17
S13 A/D	1 x HCE14	1 x HCE 17
S17 A/D	1 x HCE24	1 x HCE 24
S20 A/D	1 x HCE24	1 x HCE 24
S23 A/D	1 x HCE29	1 x HCE 29
M25 A/D	1 x HCE29	1 x HCE 29
M29 A	1 x HCE29	1 x HCE 33
M31 A/D	1 x HCE29	1 x HCE 33
M34 A/D	2 x HCE24 or 1 x HBE33	2 x HCE 24

Max. outdoor temperature 35° C

Model	Standard	Low Noise
M35 A/D	1 x HCE33	1 x HCE 42
M41 A/D	1 x HCE42	1 x HCE 49
M42 A/D	2 x HCE24	2 x HCE 24 or 1 x HBE 49
M47 A/D	1 x HCE49	1 x HCE 49
M50 A/D	2 x HCE29 or 1 x HBE49	2 x HCE 29
M58 A/D	2 x HCE29 or 1 x HBE49	2 x HCE 33
M66 A	2 x HCE33	2 x HCE 42
L83 A/D	2 x HCE 42 or 1 x HBE 87	2 x HCE 42 or 1 x HBE 87
L99 A	2 x HCE 49 or 1 x HBE 87	2 x HCE 49 or 1 x HBE 99

## Combination with Dry Cooler

Max. outdoor temperature 35° C

Model	Standard	Low Noise
S04W	1 x ESM009	1 x ELM008
S05W	1 x ESM009	1 x ELM008
S07W	1 x ESM009	1 x ELM008
S10W	1 x ESM009	1 x ELM008
S12W	1 x ESM013	1 x ELM015
S13W/H/F	1 x ESM013	1 x ELM015
S17W/H/F	1 x ESM018	1 x ELM015
S20W/H/F	1 x ESM022	1 x ELM023
S23W/H/F	1 x EST028	1 x ELM027
M25 W/H/F	1 x EST028	1 x ELM027
M29 W	1 x EST028	1 x ELM027

Max. outdoor temperature 35° C

Model	Standard	Low Noise
M31 W/H/F	1 x EST028	1 x ELM027
M34 W/H/F	1 x EST030	1 x ELM027
M35 W/H/F	1 x EST030	1 x ELM027
M41 W/H/F	1 x EST040	1 x ELT040
M42 W/H/F	1 x EST040	1 x ELT040
M47 W/H/F	1 x EST050	1 x ELT040
M50 W/H/F	1 x EST050	1 x ELT047
M58 W/H/F	1 x EST060	1 x ELT055
M66 W	1 x EST070	1 x ELT055
L83 W/H/F	1 x EST 080	1 x ELT 065
L99 W	1 x EST 080	1 x ELT 085

## Technical data - C - Chilled water

Air delivery: downwards or upwards

Model		S06	S08	S11	S15	S18	S29	M44	M55	M66	M77	L90 <sup>(6)</sup>	L10 <sup>(6)</sup>	L12 <sup>(6)</sup>	L14 <sup>(6)</sup>	L15 <sup>(6)</sup>
Total cooling capacity <sup>(2)</sup>	kW	6,2	9,2	12,6	17,5	22,4	28,8	43,6	58,6	68,8	83,5	90,7	103,4	117,9	142,8	158,9
Sensible cooling capacity <sup>(2)</sup>	kW	5,6	8,5	11,2	16,7	20,3	25,0	34,7	49,7	56,2	64,8	76,8	83,9	97,4	111,7	121,5
Water flow rate <sup>(2)</sup>	l/s	0,30	0,44	0,60	0,83	1,07	1,38	2,08	2,79	3,28	3,71	4,33	4,93	5,62	6,81	7,58
Number of fans	n°	1	1	1	1	1	1	1	2	2	2	2	2	3	3	3
Air delivery	m <sup>3</sup> /s	1395	2200	2800	4500	5200	6150	8150	12740	13650	14220	19060	20400	23100	25100	26070
Max. ESP <sup>(7)</sup> downward/upward delivery	Pa	170/190	190/190	30/50	220/220	400/400	180/180	170/170	340/350	250/250	170/190	270	180	290	180	110
Sound pressure level <sup>(5)</sup>	dB(A)	46,1	48,3	50,5	50,4	51,4	54,5	55,1	58,2	60,3	62,2	58,7	61,0	62,1	62,1	63,8
Width	mm	750	750	750	750	750	750	1000	1750	1750	1750	2050	2050	2550	2550	2550
Depth	mm	400	500	500	750	750	750	850	850	850	850	890	890	890	890	890
Net weight	kg	135	150	165	190	210	230	330	480	550	600	620	630	790	800	810

## Technical data - A/W — Direct expansion, air or water cooled

Air delivery: downwards or upwards

Model		S04	S05	S07	S10	S12	S13	S17	S20	S23	M25	M29	M31
Total cooling capacity <sup>(1)</sup>	kW	4,6	5,7	8,2	10,6	12,5	14,5	17,3	20,5	26,6	26,5	29,7	31,3
Sensible cooling capacity <sup>(1)</sup>	kW	4,3	5,3	7,7	10,1	11,0	13,8	16,4	19,2	23,6	24,2	27,2	30,3
SHR <sup>(1)</sup>		0,93	0,93	0,94	0,95	0,88	0,95	0,95	0,94	0,89	0,91	0,92	0,97
EER <sup>(1)(3)</sup>		3,29	3,35	3,28	3,66	3,57	3,82	3,68	3,42	3,41	3,56	3,35	3,51
Number of compressors	n°	1	1	1	1	1	1	1	1	1	1	1	1
Number of fans	n°	1	1	1	1	1	1	1	1	1	1	1	1
Air delivery	m <sup>3</sup> /h	1150	1350	2100	2600	2700	4200	4950	5200	5750	6340	7080	8850
Max. ESP <sup>(7)</sup> downward/upward delivery	Pa	200/250	170/180	240/240	130/130	80/80	280/280	220/220	400/400	270/270	360/380	240/280	360/420
Sound pressure level <sup>(4)</sup>	dB(A)	45,5	46,4	47,3	48,2	50,5	49,0	51,3	51,5	54,4	53,3	55,1	58,5
Width	mm	750	750	750	750	750	750	750	750	750	1000	1000	1750
Depth	mm	400	400	500	500	500	750	750	750	750	850	850	850
Net weight	kg	160	170	195	210	215	240	250	260	270	425	430	575

Model		M34	M35	M41	M42	M47	M50	M58	M66	L83 <sup>(6)</sup>	L99 <sup>(6)</sup>
Total cooling capacity <sup>(1)</sup>	kW	36,2	37,0	45,8	42,8	53,7	54,9	60,1	70,3	86,3	104,6
Sensible cooling capacity <sup>(1)</sup>	kW	34,1	35,1	43,4	41,5	49,0	49,3	52,7	58,5	79,5	89,3
SHR <sup>(1)</sup>		0,94	0,95	0,95	0,97	0,91	0,90	0,88	0,83	0,92	0,85
EER <sup>(1)(3)</sup>		3,62	3,58	3,52	3,63	3,45	3,59	3,40	3,49	3,31	3,40
Number of compressors	n°	2	1	1	2	1	2	2	2	2	2
Number of fans	n°	1	1	2	2	2	2	2	2	2	2
Air delivery	m <sup>3</sup> /h	9490	9540	11230	11370	12250	12240	12910	13470	20020	21100
Max. ESP <sup>(7)</sup> downward/upward delivery	Pa	350/350	340/340	380/380	380/390	300/300	300/300	240/250	170/180	170	90
Sound pressure level <sup>(4)</sup>	dB(A)	60,5	60,4	58,4	58,1	60,4	59,3	61,1	63,4	66,2	66,9
Width	mm	1750	1750	1750	1750	1750	1750	1750	1750	2550	2550
Depth	mm	850	850	850	850	850	850	850	850	890	890
Net weight	kg	590	580	600	600	620	635	650	670	950	1000

## Technical Data - A/W - Direct expansion, air or water cooled with Digital Scroll

Air Delivery: Downwards or Upwards

Model		D13	D17	D20	D23	D25	D34	D35	D42	D50	D66
Sel. Condenser (ext. temp up to 40°C)		1xHCE24	1xHCE24	1xHCE33	1xHCE42	1xHCE42	2xHCE24	1xHCE42	2xHCE33	2xHCE42	2xHCE42
Total cooling capacity <sup>(1)</sup>		14,70	17,30	20,50	25,80	25,80	34,90	34,80	42,40	51,20	66,00
Sensible cooling capacity <sup>(1)</sup>		13,90	16,30	19,20	23,20	24,00	33,70	34,20	41,50	47,40	56,70
SHR at Full load <sup>(1)</sup>		0,95	0,94	0,94	0,90	0,93	0,97	0,98	0,97	0,93	0,86
SHR at 80% load <sup>(1)</sup>		1,00	1,00	1,00	0,97	1,00	1,00	1,00	1,00	1,00	0,95
EER at full load <sup>(1)(3)</sup>		3,30	2,99	2,78	3,03	3,16	2,97	2,92	3,00	3,02	2,83
EER at 80% load <sup>(1)(3)</sup>		3,22	3,00	2,78	2,93	3,08	2,96	2,84	2,96	2,92	2,80
N° of compressors (dig./stand. scroll)	n°	1	1	1	1	1	1/1	1	1/1	1/1	1/1
Number of fans	n°	1	1	1	1	1	1	1	2	2	2
Air delivery	m <sup>3</sup> /s	4200	4950	5200	5750	6340	9490	9540	11370	12240	13470
Max. ESP <sup>(7)</sup> downward/upward delivery	Pa	280	220	400	270	360/380	350	340	380/390	300	170/180
Sound pressure level	dB(A)	49	51,3	51,5	54,4	53,3	60,5	60,4	58,1	59,3	63,4
Width	mm	750	750	750	750	1000	1750	1750	1750	1750	1750
Depth	mm	750	750	750	750	850	850	850	850	850	850
Net weight	kg	240	250	260	270	425	590	580	600	635	670

## Technical data - C - Chilled water

Air delivery: downwards or upwards

Model		L16 <sup>(6) (8)</sup>	L18 <sup>(6) (8)</sup>	L20 <sup>(6) (8)</sup>
Total cooling capacity <sup>(2)</sup>	kW	175,0	206,8	232,2
Sensible cooling capacity <sup>(2)</sup>	kW	134,6	159,9	172,3
Water flow rate <sup>(2)</sup>	l/s	8,35	9,86	11,07
Number of fans	n°	3	4	4
Air delivery	m3/s	29600	35410	35650
Max. ESP <sup>(7)</sup> downward/upward delivery	Pa	100	100	100
Sound pressure level <sup>(5)</sup>	dB(A)	66,5	68,5	68,6
Width	mm	2550	3350	3350
Depth	mm	890	890	890
Net weight	kg	940	1000	1085

## Available versions

Version	A/W	C	F/D/H	Constant
S04	● ● ● ●	- - - -	- - - -	- ● - ●
S05	● ● ● ●	- - - -	- - - -	- ● - ●
S06	- - - -	● ● ● ●	- - - -	- ● - -
S07	● ● ● ●	- - - -	- - - -	- ● - -
S08	- - - -	● ● ● ●	- - - -	- ● - -
S10	● ● ● ●	- - - -	- - - -	- ● - -
S11	- - - -	● ● ● ●	- - - -	- ● - -
S12	● ● ● ●	- - - -	- - - -	- ● - -
S13 / D13	● ● ● ●	- - - -	- - - -	- ● - -
S15	- - - -	● ● ● ●	- - - -	- ● - -
S17 / D17	● ● ● ●	- - - -	● ● - -	- ● - -
S18	- - - -	● ● ● ●	- - - -	- ● - -
S20 / D20	● ● ● ●	- - - -	● ● - -	- ● - -
S23 / D23	● ● ● ●	- - - -	● ● - -	- ● - -
S29	- - - -	● ● ● ●	- - - -	- ● - -
M25 / D25	● ● ● ●	- - - -	● ● - -	- ● - -
M29	● ● ● ●	- - - -	- - - -	- ● - -
M31	● ● ● ●	- - - -	● ● - -	- ● - -
M34 / D34	● ● ● ●	- - - -	● ● - -	- ● - -
M35 / D35	● ● ● ●	- - - -	● ● - -	- ● - -
M41	● ● ● ●	- - - -	● ● - -	- ● - -
M42 / D42	● ● ● ●	- - - -	● ● - -	- ● - -
M44	- - - -	● ● ● ●	- - - -	- ● - -
M47	● ● ● ●	- - - -	● ● - -	- ● - -
M50 / D50	● ● ● ●	- - - -	● ● - -	- ● - -
M55	- - - -	● ● ● ●	- - - -	- ● - -
M58	● ● ● ●	- - - -	● ● - -	- ● - -
M66 / D66	● ● ● ●	● ● ● ●	- - - -	- ● - -
M77	- - - -	● ● ● ●	- - - -	- ● - -
L83	● ● ● ●	- - - -	● ● - -	- ● - -
L90	- - - -	● ● ● ●	- - - -	- ● - -
L99	● ● ● ●	- - - -	- - - -	- ● - -
L10	- - - -	● ● ● ●	- - - -	- ● - -
L12	- - - -	● ● ● ●	- - - -	- ● - -
L14	- - - -	● ● ● ●	- - - -	- ● - -
L15	- - - -	● ● ● ●	- - - -	- ● - -
L16	- - - -	● ● ● ●	- - - -	- ● - -
L18	- - - -	● ● ● ●	- - - -	- ● - -
L20	- - - -	● ● ● ●	- - - -	- ● - -

- Downward air delivery
- Upward air delivery
- Displacement
- Front air delivery



Downwards Air Delivery



Upwards Air Delivery



Displacement



Front Air Delivery

**A/W:** Direct expansion, air or water cooled

**F/D/H:** Free-cooling e Dualfluid

**C:** Freecooling and Dual-Fluid

**Constant version:** See the product manual

**Constant Models:** Available on units with standard scroll

- (1) 24°C db, 50% R.H.; 45°C condensation (selected condenser and 35°C outdoor temp with HPM Digital models); refrigerant R407C
- (2) Sizes S06-L15 24°C db, 50% R.H.; 7/12°C water inlet/outlet.
- (3) 20 Pa ESP, downward delivery version. 50 Pa upward delivery version
- (4) 1.5 m height, 2 m front distance; free field; compressor(s) and fan (s) working. Downward delivery version
- (5) 1.5 m height, 2 m front distance; free field; fan (s) working. Downward delivery version.
- (6) Available only in the Down-ward delivery version
- (7) Max. ESP available for the indicated air delivery
- (8) sizes L16-L18-L20 are supplied with EC fans as standard
- (9) all units height is 1950 mm except L16-L20 with 2150 mm height

## Ensuring The High Availability Of Mission-Critical Data And Applications.

**Emerson Network Power**, a business of Emerson (NYSE:EMR), is the global leader in enabling Business-Critical Continuity™. The company is the trusted source for custom, adaptive and ultra-reliable solutions that enable and protect its customers' business-critical technology infrastructures. Backed by the largest global services organization in the industry, Emerson Network Power offers a full range of innovative power, precision cooling, connectivity and embedded products and services for computer, communications, healthcare and industrial systems. Key product brands within the Emerson Network Power family include Liebert, Knürr, ASCO, Astec, Lorain.

While every precaution has been taken to ensure the accuracy and completeness of this literature, Liebert Corporation assumes no responsibility and disclaims all liability for damages resulting from use of this information or for any errors or omissions.  
© 2007 Liebert Corporation  
All rights reserved throughout the world. Specifications subject to change without notice.  
© Liebert and the Liebert logo are registered trademarks of Liebert Corporation. All names referred to are trademarks or registered trademarks of their respective owners.

103026

### Emerson Network Power.

The global leader in enabling Business-Critical Continuity™.

- AC Power
- Embedded Power
- Precision Cooling
- Connectivity
- Monitoring
- Rack & Integrated Cabinets
- DC Power
- Out Side Plant
- Services
- Embedded Computing
- Power Switching & Controls
- Surge Protection

Emerson Network Power and the Emerson Network Power logo are trademarks and service marks of Emerson Electric Co. ©2007 Emerson Electric Co.

### Locations

**Emerson Network Power - Headquarter EMEA**  
Via Leonardo Da Vinci 16/18  
Zona Industriale Tognana  
35028 Piove Di Sacco (PD) Italy  
Tel: +39 049 9719 111  
Fax: +39 049 5841 257  
[marketing.emea@emersonnetworkpower.com](mailto:marketing.emea@emersonnetworkpower.com)

**Emerson Network Power - Service EMEA**  
Via Leonardo Da Vinci 16/18  
Zona Industriale Tognana  
35028 Piove Di Sacco (PD) Italy  
Tel: +39 049 9719 111  
Fax: +39 049 9719045  
[service.emea@emersonnetworkpower.com](mailto:service.emea@emersonnetworkpower.com)

### United States

1050 Dearborn Drive  
P.O. Box 29186  
Columbus, OH 43229  
Tel: +1 614 8880246

### Asia

7/F, Dah Sing Financial Centre  
108 Gloucester Road, Wanchai  
Hong Kong  
Tel: +852 2572220  
Fax: +852 28029250

[www.eu.emersonnetworkpower.com](http://www.eu.emersonnetworkpower.com)

[marketing.emea@emersonnetworkpower.com](mailto:marketing.emea@emersonnetworkpower.com)